



FLOOR PLAN




FRONT ELEVATION

NOTE: BUILDING SHOWN WITH 8" O.C.GROOVE PANEL SIDING.

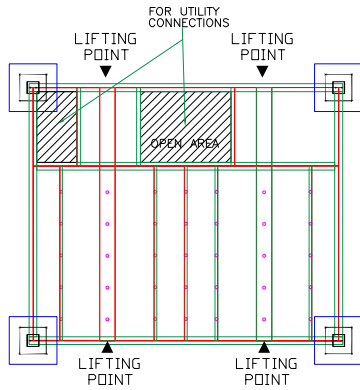

PIER LOCATION PLAN

STEEL FRAMING & LIFTING

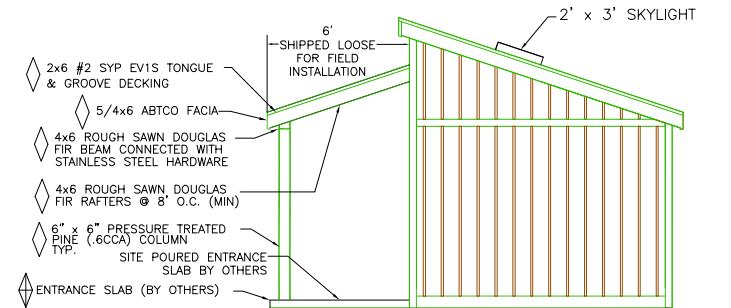

RIGHT ELEV.

- ◇ 2x6 #2 SYP EV1S TONGUE & GROOVE DECKING
- ◇ 5/4x6 ABTCO FACIA
- ◇ 4x6 ROUGH SAWN DOUGLAS FIR BEAM CONNECTED WITH STAINLESS STEEL HARDWARE
- ◇ 4x6 ROUGH SAWN DOUGLAS FIR RAFTERS @ 8' O.C. (MIN)
- ◇ 6" x 6" PRESSURE TREATED PINE (.6CCA) COLUMN
- ◇ ENTRANCE SLAB (BY OTHERS)

◇ ADDITIONAL PIERS REQUIRED
PIER TYPE P1
HIGH WIND TYPE P2
TYPICAL EACH COLUMN

NOTE: BUILDING SHOWN WITH 8" O.C.GROOVE PANEL SIDING.

◇ SYMBOL: SUPPLIED BY MANUFACTURER AND INSTALLED BY OTHERS.
◇ SYMBOL: SUPPLIED AND INSTALLED BY OTHERS.
NOTE: AMMENTITIES SUPPLIED MAY BE RELOCATED TO ACCOMIDATE TRAFFIC OR USE PATTERN WITHOUT DEVIATING FROM ADA RULES BUILDING CODES AND MODULAR SHIPPING ABILITY.

MODEL: R22-1214, 2 TOILET,
2 LAVITORY, RESTROOM BUILDING
WITH 6' FRONT PORCH ROOF



NOTE:
LANDINGS, WALKWAYS AND RAMPS ARE TO BE SUPPLIED AND INSTALLED BY OTHERS AS REQUIRED TO MEET LOCAL HANDICAP ACCESSIBILITY REQUIREMENTS.